

- ① Mount screws to fix the bracket.
- ② Tighten screws to secure the switch.
- ③ Finalize the mounting location and screw the bracket down.
- ④ Adjust bracket angle.

Your Innovative and
Reliable Partner

www.911signal.com

911 Signal Technology Inc.

Add: Room 701-702, Hengwei Building, No.258, Tiangao Lane,
Shounan Subdistrict, Yinzhou Area, Ningbo City, Zhejiang, China.
Tel: +86-574-8901 7911 +86-400 6757 911
Fax: +86-574-8282 2560
E-mail: sales@911signal.com

INSTALLATION INSTRUCTIONS

- ◎ 10-33VDC input
- ◎ 0.2W (Static Power)
- ◎ 8 LED lights to indicate traffic advisor status
- ◎ System ON/OFF with short press, function setting saved with long press
- ◎ 180 degrees adjustable bracket
- ◎ Easy-to-follow wire-to-wire connection
- ◎ Legends display customizable. Pictures only for reference
- ◎ Max Input Current: <16A
- ◎ Max Output Current of One Wire: 2A

FLOW Switch


Item: 031201

www.911signal.com




WIRING:

Lightbar Control

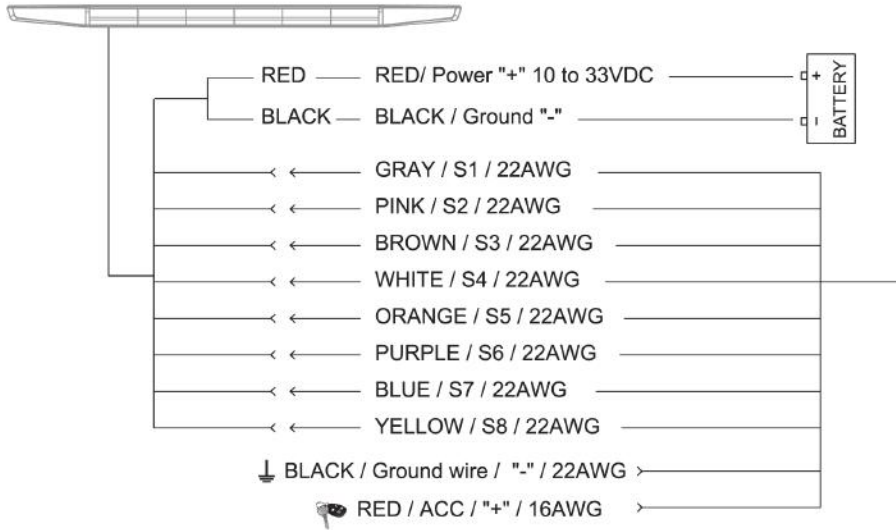

Loaded With Other Lights

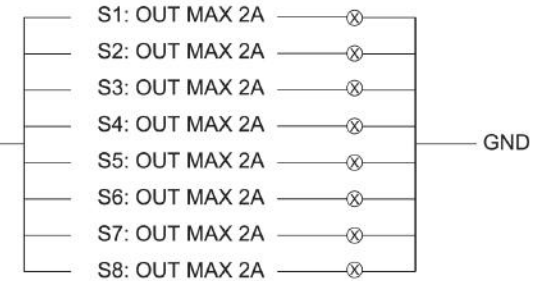

FUNCTION:

1. Turning the switch on and off



Power up. 2 beeps indicates standby mode. Press or dial the button to select functions. Light indicator under each legend will move as you dial the button.



Leave the product for 5 seconds to resume standby mode.

FUNCTION:

2. Select or unselect functions



Under standby mode, press the button to select function. Lit legend indicates the function is confirmed. Press again to cancel the function selected.

3. Quick Off and quick access to previous setting



Randomly choose a function and press 3 seconds to shut down all functions. Press 3 seconds to retrieve the previous setting.

FUNCTION:

4. Inching output



When loaded with other products, press twice consecutively to change flash patterns.

Note: Different panels are provided. Choose one and stick it to the product before using.