

911 SIGNAL[®]



BLAZERS


TECHNICAL SPECIFICATIONS

Item	091401
Voltage	DC 10-33V
Max Power	30W
Frequency	200-1600HZ
Sound Distortion	≤5%
Sound Intensity	≥110dB
Siren Tones	30
Certification	ECE R10

FEATURES

- 10-33V multi-voltage input, multiple speakers work synchronously to improve the sound intensity and a function to decrease the volume at night, meet requirements for sound output;
- An output integration of amplifier, speaker and lighting control, compact design for simple installation and space saving;
- 30 programmable siren tones for versatile needs in different regions and industries.
- Supports external microphones (optional)
- Supports up to 8amp warning light, the external warning light operates synchronously with the siren.
- A separate input control line allows individual on/off control over the warning light.

WIRING

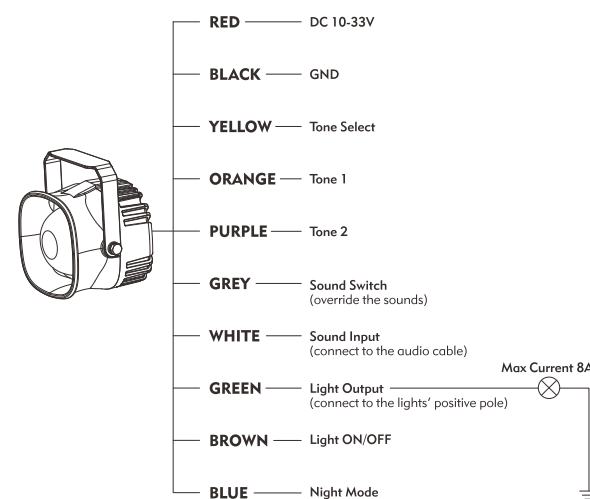


Note: There are no pre-set tones




Do not connect GRN/WHI wire to the positive terminal of the battery.

DIMENSIONS

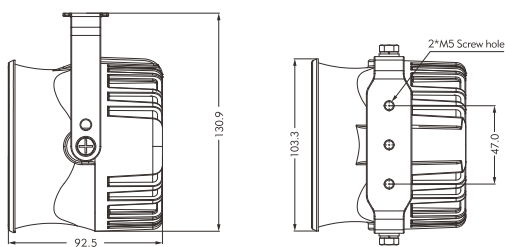

MOUNT



Please wear hearing protection equipment, for loud sound may damage hearing ability.



SIREN TONES

1	Wail
2	Yelp
3	Piercer
4	Airhorn
5	Hi/Low
6	China police
7	China ambulance
8	Francia Police
9	Francia Gendarmerie
10	Francia Sapeur-pompiers
11	Francia ambulance
12	Francia private ambulance
13	Italia ambulance
14	Italia Police
15	Fire Brigade (Italy and Czech Republic)
16	Yelp*249
17	POWERCALL
18	UNITROL-ULTRAHILO
19	UNITROL-HERTRO
20	Hi/Low 466p
21	Horn
22	Wail (SUBTONE)
23	Yelp (SUBTONE)
24	Piercer (SUBTONE)
25	Airhorn (SUBTONE)
26	Hi/Low (SUBTONE)
27	POWERCALL (SUBTONE)
28	UNITROL ULTRAHILO (SUBTONE)
29	UNITROL HERTRO (SUBTONE)
30	Manual

911 Signal Technology Inc.

Add:Room 701-702,Hengwei Building,No.258, Tiangao Lane, Shounan Subdistrict, Yinzhou Area,Ningbo City, Zhejiang,China.

Tel: +86 574 89017911 +86 400 6757911
 Fax: +86 574 82822560
 Email: sales@911signal.com
 Website: www.911signal.com